


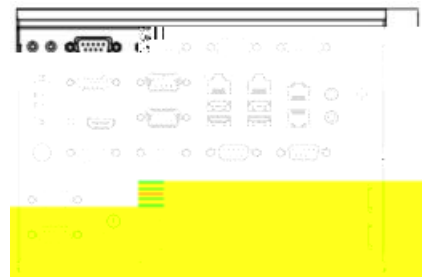




- DDR5-SODIMM 64GB
- VGA+HDMI
- 4 USB 3.0 4 GbE LAN
- RS232/422/485, 8 RS232 2x8bit GPIO
- 1 M.2 B-key 3052 Micro SIM 5G
- 1 M.2 Key-E for Wifi/BT
- PCIe/PCI
- DC IN 12V



		HG3450G		
	BIOS	UEFI		
		2xDDR5 , SODIMM,max 64G		
		/ /Win10/Win11 OS		
I/O	USB	4xUSB3.0, 1xUSB2.0 type A for USB Dongle		
	COM	2xRS232/422/485 8xRS232		
	GPIO	2xDB9 8bit GPIO		
	LED	1xPower, 1xHDD		
	PCIe/M.2/Mini-PCIe	1 M.2 Key-E for Wifi/BT 1x M.2 B-key 3052 Micro SIM 5G 1xPClex8+1PCI 2xPClex8		
	Interface	1xVGA, 1xHDMI		
	Storage Device	2 x SATA3.0, 1xM.2 SSD NVME(PCIe5.0 X4)		
	Audio IC	SN6186		
	Audio Interface	1xMic-in, 1xLine-out		
	LAN IC	3xRTL8111M-CG, 1xYT8531H-CA		
	Interface	4xRJ45		
	Power Input	12V, DC-in,		
	Power Interface	2-Pole Phoenix DC plug in		
	Watchdog Timer	1 to 255 sec./min. per step		
	TCM	Z32H330TC TCM2.0		
	Dimensions (L*W*H)	200*205*142.5 mm		
	Mounting	Desk/Wall-mounting		
	Operating Temp.	-10 ~60		
	Storage Temp.	-40 ~85		
	Humidity	95%@40 C non-condensing		
	Shock	With SSD: 15G, IEC 60068-2-27, half sine, 11ms duration		
	Vibration	With SSD:2Grms, IEC 60068-2-64, random 5~500Hz 1 hr/axis		

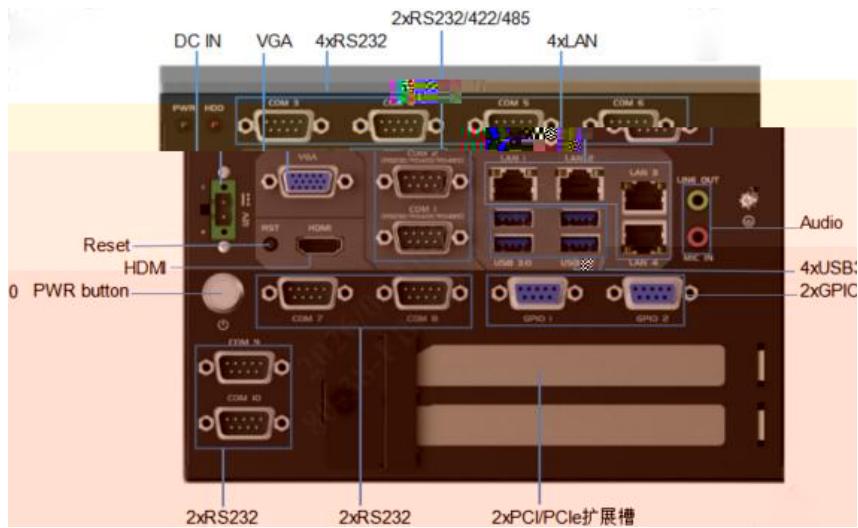

JVC-9101

			DIMM	LAN	USB 3.0	COM	GPIO	SATA 3.0	M.2 SSD	PCI/ PCIe
JVC-9101	HG3450G	2	2	4	4	10	2	2	1	1/1 0/2



JVC-9101	JVC-9101	1
NA	&	1